

STANDARD SKIRTING

Technical data sheet
English


QUICK·STEP®
FLOOR DESIGNERS

General information

Straight skirting that perfectly matches the colour of your floor. You can adjust the height (40 or 58 mm). For a swift installation, just use the Quick-Step One4All Glue. To achieve a watertight finish, we suggest you combine the standard skirting with the Foamstrip (NEFOAMSTRIP20), Hydrokit (QSKITTRANSP) and Hydrostrip (NEHSTRIPSK15). This shape is also available in a white, paintable version (QSSKPAINT).





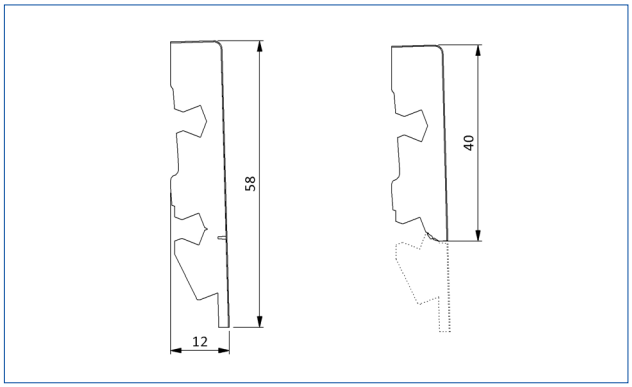

Contents	Composition	Colour
Standard skirting (6 pieces per pack)	MDF with laminate foil	Colour matched

Order code	Dimensions
QSSK(-)	2400 x 12 x 58 mm

Applicable for:

All Quick-Step laminate floors.

The floor must be able to expand and contract on all sides. This is why an expansion gap must be provided on all sides of the floor, around pipes, thresholds and under door frames. The exact expansion gap size depends on the floor type. Consult the installation instructions of your Quick-Step floor to know the required size of the expansion gap. To finish off this gap, we offer a wide range of skirtings and profiles.

Features

Quick-Step accessories are specifically developed for Quick-Step floors.

Perfectly matching colour

Quick-Step skirtings are available in a design that matches your floor perfectly.

Excellent wear- and scratch resistant surface

The durable laminate top layer helps protect the skirtings against everyday wear and tear.


High-quality MDF base

Protected against moisture

To achieve a watertight finish, we suggest to combine the standard skirting with the Foamstrip (NEFOAMSTRIP20), Hydrokit (QSKITTRANSP) and Hydrostrip (NEHSTRIPSK15).

Quick-Step warranty

Quick-Step skirtings are high quality. They come with the same warranty as your Quick-Step floor.

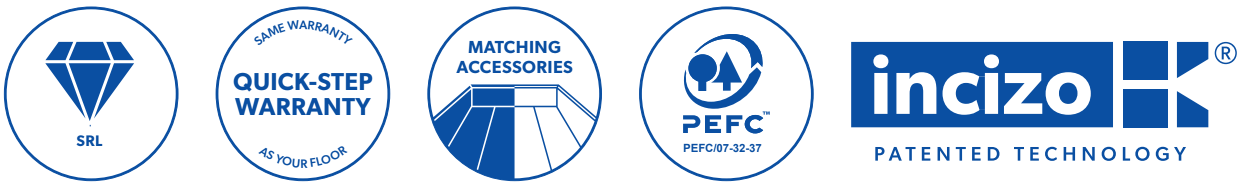

Installation

Skirting with Incizo technology

The standard skirting is equipped with the patented Incizo technology, so you can also cut it down to a skirting of 40 mm high. Use a strong and sharp Stanley knife to do this. Cut along the notch provided in the front and at the back. Now it is possible to break off the skirting by hand.

Make sure you use a sharp saw blade when mitering your skirting.

Installation with Quick-Step One4All Glue

The multifunctional One4All Glue (QSGLUE290) was specifically designed for installation of all Quick-Step accessories.

Installation with the Quick-Step Clips

Quick-Step standard skirtings can be installed with the Quick-Step clips. The advantage here is that the installation of the clips is glueless and screwless so you do not damage the wall. Moreover, it is speedy with up to 50% gain in time.

Please refer to the technical data sheet of the Quick-Step Clips (QSCLIPSKME(-)) for further installation tips.

ATTENTION:

- The clips should be installed at the same time as your floor.
- The clips cannot be used in combination with 12 mm floors.
- They can only be used if the skirting is installed at full height (58 mm), not as a skirting of 40 mm.
- The clips also ensure that the skirtings fit nicely along the wall and in the corners.
- Use the plastic piece, supplied with the clips, to cut the mitred corners correctly. Make sure you use a sharp saw blade when mitering your skirtings.

Unilin bv division flooring
Ooigemstraat 3, B-8710 Wielsbeke
T: +32 56 67 52 11
unilin.com
quick-step.com